

轻商生产技术室

2026 04 16

3

4

6

6

13

13

14

1.1

1.2 1

GB/T 13564-2022

GB/T 43499-2024

GB/T 33191-2016

GB/T 13563-2007

GB/T 17993-2024

JT/T 478-2020

GA/T 708-2019

GA/T 134-2021

GB/T 26765-2021

GB/T 13423-2024

GA 329-2021

[1996] 090

[1998] 082

1.10

2.1

2-1

1

2

3

P Ê"- G ~ 1y

4

× f &de #â .

		/ 2@ q/ (&T(P▯V	
		!	
		#1505027B 09° 1qp %2814PW#•D	

07Eñ cU I#|

2

16G 1T

4.1.1.2 2

4.1.2

0 120000cd ± 12%

— 35cm/dam 52.5cm/dam 2 ° 3 °

— 52.5cm/dam 52.5cm/dam 3 ° 3 °

— 35cm/dam 52.5cm/dam 2 ° 3 °

— 52.5cm/dam 52.5cm/dam 3 ° 3 °

— 35cm/dam 52.5cm/dam 2 ° 3 °

350 1400mm ± 10mm

-10 0

≤ 90%

70.0kPa 106.0kPa

0.4-0.6MPa

50Hz ± 1Hz

5m

AC 220V ± 10%

4.3

4.4

4.4.1

4.4.1.1 win11/64

16G 1T

4.4.1.2 2

*4.4.1.3

4.4.1.3.1 ABS/ESC

4.4.1.3.2 7 ABS/ESC

4.4.1.3.3

4.4.1.3.4 ABS/ESC

*4.4.1.4 0.8

2.1

4.4.2

mm	*	0.8—2.1	25CM
mm	*	0.8—2.1	25CM
daN		$\geq 1500 \times 2$	
daN		1	
%		$\leq \pm 3$	
/		$\leq \pm 2$	
kW		$7.5\text{kW} \times 2$	
		2.5	
ABS	km/h	0-10	
ABS			

4.4.3

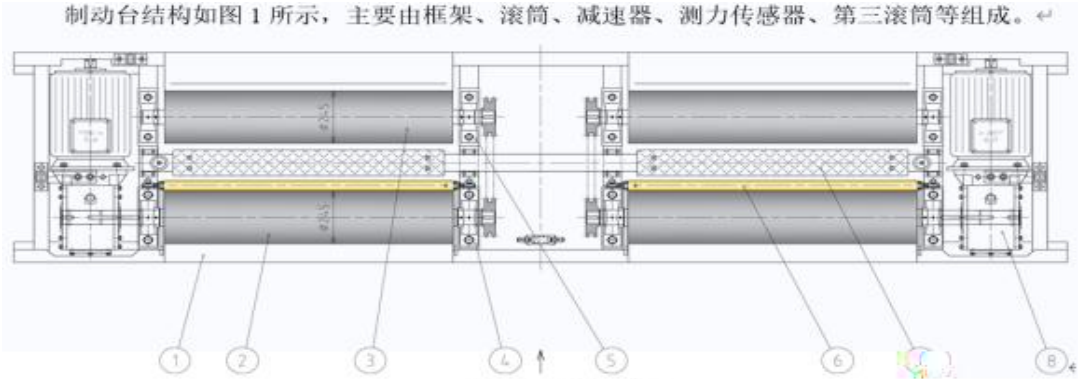


图 1 制动台结构示意图

1-框架	2-主滚筒	3-副滚筒	4-主滚筒轴承
5-副滚筒轴承	6-第三滚筒	7-举升装置	8-减速器

4.4.4

4.4.4.1

14

80

3

96

14

7.5—7.9,

0.8

4.4.4.2

4.4.4.3

4.4.4.4

4.4.4.5

4.4.4.6 ABS

4ECU

Đ g / ħ

, ABS

4.4.5

0E1,- { C,, @ ~VT30C•

0.35

*

***4.5.1.3**

0.8 2.1


***4.5.1.4**

3400×800×400

4.5.2

	GB7258-2017 GB38900-2020		
kg	3000 3t		
(km/h)	0-120		
(mm)	*	0.8—2.1	25CM
mm	*	0.8—2.1	25CM

4.5.3

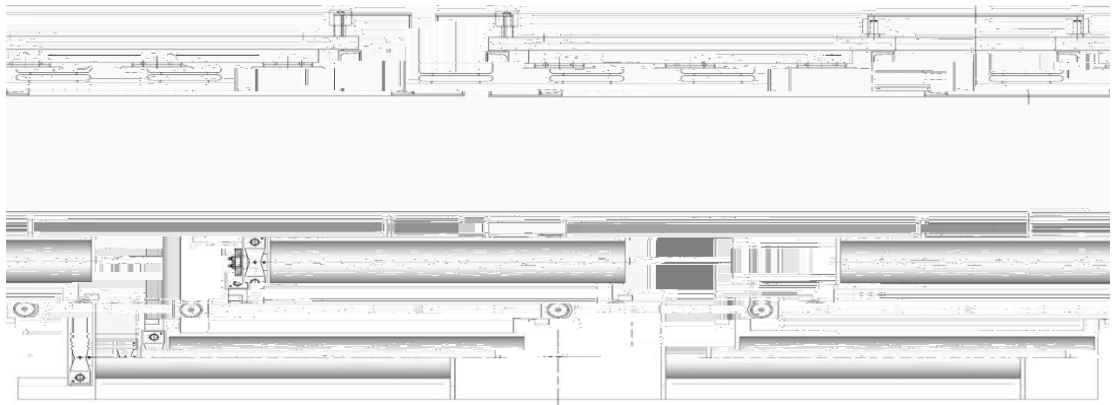

4.5.3.1

4.5.3.2

4.6

4.6.1

4.6.2

4.6.3 /

4.6.4 (
ABS)

4.6.5

word

4.6.6

ERP

4.6.7

win11/64

16G 1T

win11/64

16G

1T

4.6.8 1 1

4.7

4.7.1

win11/64

4.7.2 OBD() ()

4.7.3 AD

4.7.4 1

***4.7.5 ECU**

ECU

OBD

***5.1 5%**

***5.2**

***5.3**

5.4

5.5 90

***6.1**

6.2

6.3

6.4

6.5

→

→

→

→

→

6.6

6.7

2

1)

2)

3)

CAD

4)

5)

6)

U

7)

8)

9)

10

6.8

7.1

*7.2

7.3

7.4 6

12 18 24

7.5 2

24

48

7.6 30

2 2 /

3

7.7

7.8

7.9 /

;